

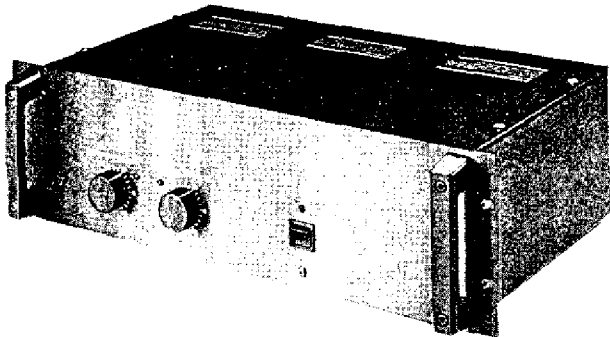
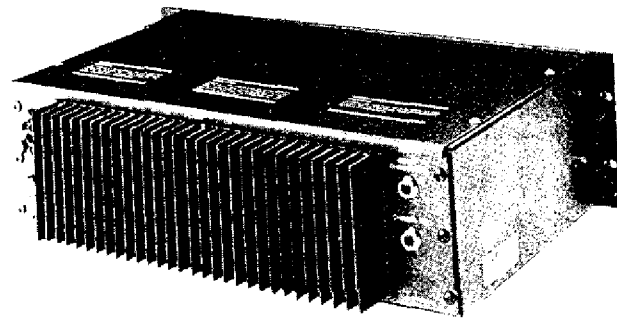


The Precedent Series

Model 900

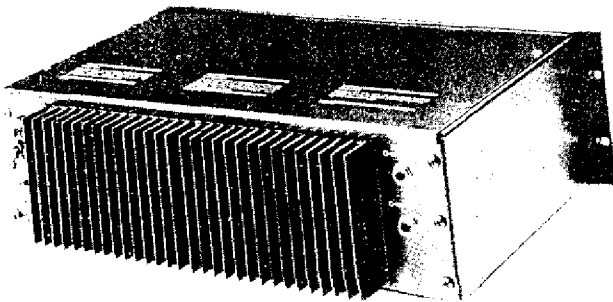

Model 600

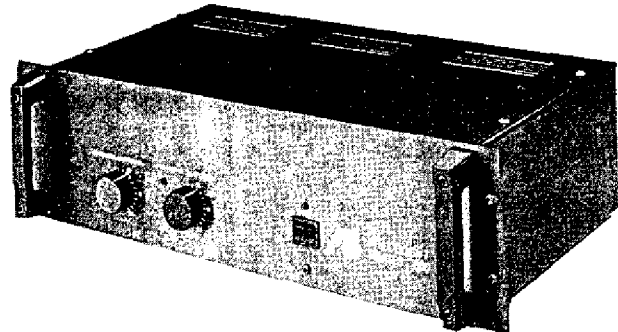

SPECIFICATIONS	900	600
TYPE	TWO CHANNEL AUDIO POWER AMPLIFIER	TWO CHANNEL AUDIO POWER AMPLIFIER
GAIN	30.5dB (EACH CHANNEL)	28dB (EACH CHANNEL)
CONTINUOUS AVERAGE POWER OUTPUT	300 WATTS PER CHANNEL AT 8 OHMS 450 WATTS PER CHANNEL AT 4 OHMS	175 WATTS PER CHANNEL AT 8 OHMS 300 WATTS PER CHANNEL AT 4 OHMS
FREQUENCY RESPONSE	PLUS MINUS 0.25dB 20Hz-20kHz	PLUS MINUS 0.25dB 20Hz-20kHz
DISTORTION	NO MORE THAN 0.25% THD OR IM 0.01W TO RATED POWER. 20Hz to 20kHz (TYPICALLY 0.01%)	NO MORE THAN 0.25% THD OR IM 0.01W TO RATED POWER. 20Hz to 20kHz (TYPICALLY 0.01%)
HUM AND NOISE	104dB BELOW RATED OUTPUT (UNWEIGHTED 20kHz BANDWIDTH)	104dB BELOW RATED OUTPUT (UNWEIGHTED 20kHz BANDWIDTH)
INPUT SENSITIVITY	1.5V RMS FOR RATED OUTPUT	1.5V RMS FOR RATED OUTPUT
INPUT IMPEDANCE	15K OHMS NOMINAL	15K OHMS NOMINAL
INPUT CONNECTORS	(2) 1/2-INCH PHONE JACKS (UNBALANCED)	(2) 1/2-INCH PHONE JACKS (UNBALANCED)
OUTPUT CONNECTORS	DUAL 5-WAY BINDING POSTS	DUAL 5-WAY BINDING POSTS
CONTROLS & INDICATORS	(FRONT PANEL) AC MAINS POWER SWITCH, POWER ON LED INDICATOR, CHANNEL ONE AND TWO LEVEL CONTROLS, CLIP INDICATORS	(FRONT PANEL) AC MAINS POWER SWITCH, POWER ON LED INDICATOR, CHANNEL ONE AND TWO LEVEL CONTROLS, CLIP INDICATORS
POWER	(100-130VAC, 50-60Hz) 90W (idle); 1400W (maximum)	900W (idle); 750W (maximum)
DIMENSIONS	5 3/4" H (13.3cm) 19" W (48.3cm) 1 1/8" (30.2cm) BEHIND PANEL 13 3/8" (34cm) OVERALL	5 3/4" H (13.3cm) 19" W (48.3cm) 1 1/8" (30.2cm) BEHIND PANEL 13 3/8" (34cm) OVERALL
WEIGHT	40 LBS. (18.1kg)	30 LBS. (13.6kg)
ACCESSORIES	HEATSINK MOUNTING FAN SHROUD	HEATSINK MOUNTING FAN SHROUD